



Model: S05-DC

S-SERIES, 5inCH SURFACE MOUNT – DC_{input}
Low Profile, Fully Integrated LED Light Fixture

SPECIFICATIONS & FEATURES

WHERE TO USE – Interior or exterior under covered surface, new construction and/or retro-fit installations where surface mount or recessed lighting is required. Install in RM, NC, IC, ICAT & Fire Rated applications.

TYPICAL APPLICATIONS – Commercial, hospitality, residential, and industrial locations where general illumination is required. Use in breezeways, corridors, offices, hotels, conference rooms, kitchens, multi-family, garages & more.

DESIGN & CONSTRUCTION – Patented low profile planer design utilizing Light Forward Heat Forward thermal management. 100% aluminum with 40% recycled content. Fixture is recyclable. Durable powder coated finish.

MOUNTING/INSTALLATION – *New Construction*: mounts directly into any standard 1900 (45) or Octagonal JBox. *Retrofit*: mounts directly into any 4" or larger recessed fixture with Silescent single or 2-piece mount kit.

CEILING THICKNESS – Up to 3 inches thick (ceiling depths > 3" available as custom).

ULTRA LOW PLENUM – Only requires the depth of installed J-Box.

ELECTRICAL – Low voltage input, Class 2 capable.

DIMMING – Digital control input using Silescent SimpleNet communications protocol and Silescent TouchControl wall switches. Custom interface capable using Silescent DCI modules. Provides smooth dimming throughout the dimming range (1 – 100%).

LIGHT DISTRIBUTION – Wide area dispersion, 170 degrees.

ADVANCED INTELLIGENT LIGHT ENGINE – Active thermal feedback monitors both LED & driver to protect against risk of overheating and assuring expected life.

SERIAL NUMBER CONTROL – Addresses legacy lighting concerns. Each light Engine is serial number controlled should a fixture fail & need to be repaired or replaced.

LISTINGS & COMPLIANCE – UL1598 surface mount listed Canada & US (ETL label), wet location under cover ceiling. IP65 & RoHS compliant.

EXTRA LONG LIFE – 100,000 operating hours (@ 10 hrs/day is > 27 years)

WARRANTY – 5 year limited warranty, both LED and driver. Full warranty details available at www.silescent.com

MADE IN USA – Both driver and fixture are designed, engineered and manufactured In Ft. Lauderdale FL (ARRA & NAFTA compliant).

OPTIONS


TRIM RING STYLES – Round-Flat, Round-Dish, Square-Flat, Square-Bevel.

FINISH – Powder Coat Finish Standard. Custom plating & colors available (RAL).

LAMP TEMPERATURES (CCT) – 2700, 3000, 3500, 4000 & 5000 Kelvin (CRI>80). 70 & 90 CRI available upon request.

OPTICS – Donut diffuser, Solid diffuser, Double diffuser & Vandal bezel. Provides wide area dispersion, ~170 degree beam spread.


WATTAGE LEVELS – Available in 5, & 10 watts. Custom wattages or lumen levels available upon request.

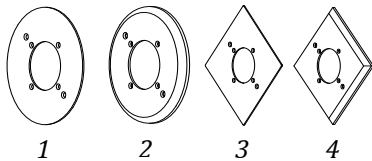

| | |
|-------------|------|
| Item Code | Type |
| Project | |
| Comments | Date |
| Prepared by | |




SD3 Optic Shown

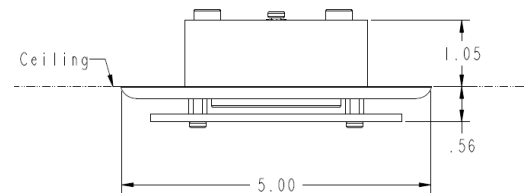

ELECTRICAL DATA

- **Operating Temp:** -40C to +40C
- **Ambient Temp:** <35C
- **Operating Voltage:**
 - **HD3** 42 – 60VDC (48VDC Nominal)
 - **DD3** 21 – 36VDC (24VDC Nominal)
- **Rated Wattage:** up to 10 watts (*see individual fixture photometrics*)

Optic Options

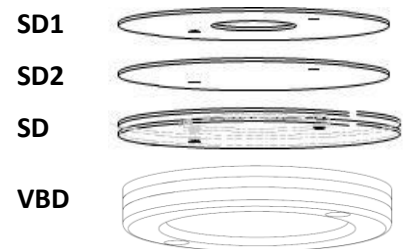

Sample Number: S052C01DD335SD110w

ORDERING INFORMATION

| Series | Style/Size | Finish/Color | Driver | Color | Optics | Wattage Levels |
|-------------------|---|----------------------------------|--|--|--|---------------------------------|
| S05 | 2 | C01 | DD3 | 35 | SD1 | 10w |
| S05 - 5in Surface | 1 - Round/Flat 2 - Round/Dish 3 - Square/Flat 4 - Square/Bevel | C01 - PC-White C08 - PC-Black | DD3 - 24VDC _{in} HD3 - 48VDC _{in} | 27 - 2700K (80CRI) 30 - 3000K (80CRI) 35 - 3500K (80CRI) 40 - 4000K (80CRI) 50 - 5000K (80CRI) | SD1 - Donut SD2 - Solid SD3 - Dbl Diffuser VBD - Bezel Diffuser | 05w - 5 watts 10w - 10 watts |



MADE IN USA

Silescent Lighting Corp. • 1417 S.W. 1st Ave. • Ft. Lauderdale, FL 33315 • P: 877.766.8448 • F: 954.206.0071 • www.silescent.com • info@silescent.com